

PVCu Angle Beads

For use on all plastered and rendered corners where a true, sharp corner is required. Its strong rigid arris protects and reinforces plaster where it is most vulnerable.

The most appropriate Catnic bead should be chosen to suit the application, required plaster depth and the desired finish.

Application and installation should be in accordance with **BSI BS EN 13914 Part 1 and 2:2016** **BSI BS 8481:2006**. Catnic PVCu plaster beads are manufactured from virgin polyvinylchloride unplasticized, which is impact resistant, external window grade and UV stable.

Application:


Fix beads simply in one of the following ways:

1. Using stainless steel nails complying with BS 1202:Part 1, fixed at a maximum of 600mm apart. When nailing to a solid background the line of the bead will follow the line of the background.
2. Press the bead onto dabs of the same material as the undercoat; dabs should be applied at a maximum of 600mm apart. This method will even out minor irregularities in the line of the background, although the line of the bead will tend to generally follow the line of the background.
3. When beads are used with metal lath backgrounds, stainless steel tying wire may be used to secure the beads in position. Soft stainless steel wire complying with BS EN 1008-3:2014 should be used to match the bead and lath materials. All wires should be twisted tightly and the ends bent away from the finished face of the coating.

Beads may be trimmed to length using fine toothed hacksaw or tin snips. PVC pipe weld adhesive can be used for butt joints in conjunction with link pegs where required.

Catnic
Pontypandy Industrial Estate
Caerphilly
CF83 3GL
T: 029 2033 7900
F: 029 2086 7796

02/2021



PVCu Angle Beads


PAB10	PAB12	PAB15	PAB20
8 - 10 depth mm	10 - 12 depth mm	13 - 15 depth mm	16 - 20 depth mm
50 per box	40 per box	30 per box	25 per box
T = 10mm	T = 12.5mm	T = 17.5mm	T = 22mm
W = 40mm	W = 40mm	W = 40mm	W = 40mm
L = 2.5m	L = 2.5m	L = 2.5m	L = 2.5m

Suitable for Internal and External use

Benefits of PVCu beads:

- Precision engineered perforation pattern
- 0.25mm high ribs at regular intervals
- Pro-Grip™ adhesion system for a stronger bond
- Withstands most site damage, non corrosive & unaffected by weathering
- Impact resistant, lightweight and safe handling

Catnic PVCu plaster beads have been designed to be used externally where galvanised beads are not recommended, and internally in areas where high moisture or damp exist. A great range of colours offer a variety of finish effects:

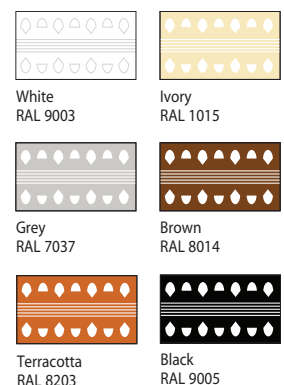

Needs another colour? Supply us with a RAL number and we can match it*

*Terms and conditions apply.

www.catnic.com

Care has been taken to ensure that the contents of this publication are accurate, but Tata Steel Europe Limited and its subsidiaries, which includes Tata Steel UK Limited, do not accept responsibility or liability for errors or information that is found to be misleading. Before using products or services supplied or manufactured by Tata Steel Europe Limited and its subsidiaries, customers should satisfy themselves as to their suitability.

© Copyright 2021 Tata Steel UK Limited.